

CONVEY-ALL
INDUSTRIES INC.



COMMERCIAL SEED TENDER

CST-1500, CST-C Series, CST-34 Series

CST-1500

Use the CST-1500 year round. Weigh and transport seed to your air seeder in Spring. Receive grain from a combine in Autumn and haul product to the market any time.

With a load capacity of 1500 Cubic Feet, and unload rate of 2 tons per minute, the CST-1500 is the largest tender on the market.



16 Function Wireless Remote Control with Scale Readout, and remote control tarp



Internal Catwalks Across All Hoppers



CAT Diesel Engine with Self-Contained Hydraulics



Camera Package



Standard Features:

- 5 Hoppers, 1500 Cu. Ft. (1200 Bu.)
- Stainless Steel Conveyor Construction
- Stainless Steel Slopes & Gates
- 12 gauge Hopper Construction
- Two Coat High Solids Polyurethane
- 20" Slave Conveyor
- 16" Paddle Belt Discharge Conveyor with Side Shuttle
- LED Working Lights
- Internal Cat Walk
- Ladders, Front and Rear
- Site Glass and Access Holes
- CAT Diesel Engine
- Self-Contained Hydraulics
- Camera Package
- LED Gate Indicators
- Air Ride Trailer
- Aluminum Outer Wheels with Poly Fenders
- Aluminum Anodized Control Valves with Manual Override

Optional Feature:

- Weigh Scale Package



Air Ride Trailer with Aluminum Outer Wheels and Poly or Chrome Fenders



Aluminum Anodized Control Valves with Manual Override



16" Paddle Belt Discharge Conveyor with Hydraulic Side Shuttle to Expose Discharge Spout

CST-C Series

20-C 26-C 32-C 40-C

These multi-compartment tenders, can be used to transfer various fertilizers and seed(s) in one trip. There is only one set-up required.

The time to fill your seeding equipment is greatly reduced. The use of conveyors ensure no seed damage or cross-contamination.



Hopper Access Hole
and Sight Glass



Electric Roll Tarp



Optional Weigh Scale



Gas Engine



Standard Features:

- 12 gauge Hopper construction
- Stainless Steel Hopper Slopes and Gates
- Two Coat Polyurethane Paint Finish
- Epoxy Coated Interior
- 20" Slave Conveyor
- 10" Tube, 16" Belt Folding Conveyor
- Ladders, Front and Rear
- LED Gate Indicators
- Site Glass and Access Holes
- Removable Rear Conveyor
- Electric Tarp Control
- Aluminum Anodized Control Valve with Override

Optional Features:

- 50 Hp CAT Diesel Engine
- Self-Contained Hydraulics
- Internal Catwalk
- Camera Package
- Stainless Steel Conveyors
- Working Lights Package
- Trailer (32' and 40' Models)
 - Air Ride / Spring Ride
- Weigh Scale Package



Spring Ride, Tri-Axle Container Trailer
with Poly Fenders



Aluminum Anodized Control Valves
with Manual Override



LED Gate Indicators

CST-34 Series

1634 1834 2034 2434

The CST-34 Tender Series can be used to fill floaters, fertilizer spreaders, lower air seeder commodity carts and more.

Available in four different configurations, this series is designed to mount on your standard 34" truck frame.

The multiple compartment design allows you to haul a variety of different products on the same trip.

Using the load out conveyor system minimizes the risk of cross-contamination or product damage.



High Quality Electric Roll Tarp



Catwalk and Ladders



Gas Engine with Self-Contained Hydraulics



Standard Features:

- Manufactured for a 34" Rail Mount
- 34" Frame Mount
- 12 gauge Hopper Construction
- Stainless Steel Hopper Slopes and Gates
- Full Length Catwalk
- Rear Ladder
- High Quality Electric Roll Tarp
- 10" Tube, 16" Belt
- Manual Hydraulic Controls
- Acrylic Urethane Exterior

Optional Features:

- Self-Contained Hydraulic Pack
- Stainless Steel Conveyor
- Wireless Remote Control
- Poly Fenders
- Fender Mounts
- Rear Unloading Conveyor



34" Frame Mount



Discharge Spout





10" Folding Conveyor with
16" Crescent Top Rubber Belt

SPECIFICATIONS:

| Model | A (Length) | B (Width) | C (Height) | Conveyor Length | D (Discharge Min/Max Heights) | E (Swing) | Total Cubic Feet (Bushels) | Total Tons | Number, Size of Hoppers | Cubic Feet per Hopper |
|----------|---------------|--------------|---------------|--------------------|-------------------------------------|--------------|----------------------------------|---------------|-------------------------------|--------------------------|
| CST-1634 | 27' 3" | 8' | *13' 8" | 20' | 9' 9" @ 23° † 11' 10" @ 30° † | 80°, 25' 7" | 606 cu. ft. (487 bu.) | 14.5 | 2 - 8' | 8' = 303 |
| CST-1834 | 29' 4" | 8' | *13' 8" | 20' | 9' 9" @ 23° † 11' 10" @ 30° † | 80°, 25' 7" | 696 cu. ft. (560 bu.) | 16.7 | 3 - 6' | 6' = 232 |
| CST-2034 | 31' 3" | 8' | *13' 8" | 20' | 9' 9" @ 23° † 11' 10" @ 30° † | 80°, 25' 7" | 767 cu. ft. (616 bu.) | 18.4 | 2 - 6' 1 - 8' | 6' = 232 8' = 303 |
| CST-2434 | 35' 4" | 8' | *13' 8" | 20' | 9' 9" @ 23° † 11' 10" @ 30° † | 80°, 25' 7" | 909 cu. ft. (730 bu.) | 21.8 | 3 - 8' | 8' = 303 |
| CST-20-C | 30' 6" | 8' 5" | 13' 5" | 30' 3" | 4' 9" @ 4° 16' 9" @ 30° | 52°, 22' 10" | 710 cu. ft. * (571 bu.) | 16.7 | 2 - 6' 1 - 8' | 6' = 205 8' = 300 |
| CST-26-C | 36' 6" | 8' 5" | 13' 6" | 30' 3" | 4' 9" @ 4° 16' 9" @ 30° | 52°, 22' 10" | 915 cu. ft. * (735 bu.) | 21.6 | 3 - 6' 1 - 8' | 6' = 205 8' = 300 |
| CST-32-C | 42' 6" | 8' 5" | 13' 5" | 30' 3" | 4' 9" @ 4° 16' 9" @ 30° | 52°, 22' 10" | 1200 cu. ft. * (965 bu.) | 26.5 | 4 - 8' | 8' = 300 |
| CST-40-C | 50' 6" | 8' 5" | 13' 5" | 30' 3" | 4' 9" @ 4° 16' 9" @ 30° | 52°, 22' 10" | 1500 cu. ft. * (1200 bu.) | 33.15 | 5 - 8' | 8' = 300 |
| CST-1500 | 45' 3" | 8' 5" | 13' 4" | 25' 7" | 8' 8" @ 15° 19' 1" @ 40° | 144°, 42' 7" | 1500 cu. ft. * (1200 bu.) | 33.15 | 5 - 8' | 8' = 300 |

* "C" model capacities based on load filled to angle of repose


† Measurements based on 36" high truck bed

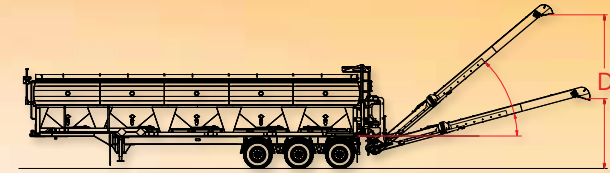

OPTIONAL FEATURES:

| Model | Weigh Scale | Stainless Steel Conveyor | Paddle Belt | Camera Package | Remote Control | Remote Control Tarp | Self-Contained Hydraulics | Working Lights | Aluminum Wheels | Cat Walk | Diesel Engine |
|----------|-------------|--------------------------------|----------------|-------------------|-------------------|------------------------|------------------------------|-------------------|--------------------|----------|------------------|
| CST-1634 | ✗ | ✓ | ✗ | ✗ | ✗ | ✗ | ✓ | ✓ | ✗ | Standard | ✗ |
| CST-1834 | ✗ | ✓ | ✗ | ✗ | ✗ | ✗ | ✓ | ✓ | ✗ | Standard | ✗ |
| CST-2034 | ✗ | ✓ | ✗ | ✗ | ✗ | ✗ | ✓ | ✓ | ✗ | Standard | ✗ |
| CST-2434 | ✗ | ✓ | ✗ | ✗ | ✗ | ✗ | ✓ | ✓ | ✗ | Standard | ✗ |
| CST-20-C | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |
| CST-26-C | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✗ | ✓ | ✓ |
| CST-32-C | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| CST-40-C | ✓ | ✓ | ✗ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| CST-1500 | ✓ | Standard | Standard | Standard | Standard | Standard | Standard | Standard | Standard | Standard | Standard |

Specifications and options subject to change without notice

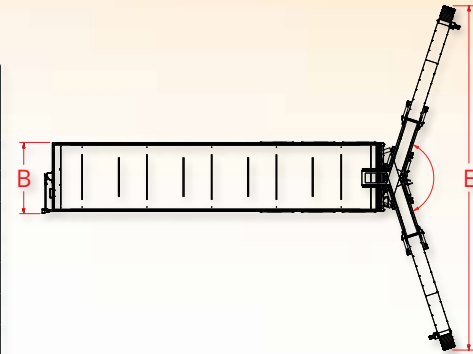

**CONVEY-ALL
INDUSTRIES INC.**

INNOVATIVE QUALITY
SOLUTIONS

130 CANADA STREET, WINKLER MANITOBA R6W 0J3 CANADA
1.800.418.9461 convey-all.com

PRINTED IN CANADA

©2016 Convey-All Industries Inc. All Rights Reserved